


OEM Read/Write Stick - 125kHz

The iDTRONIC OEM Read/Write Stick 125kHz has been designed for the support of all EM Read Only and Read/Write and NXP Hitag tags (including Hitag S).

The iDTRONIC 125kHz RFID Read/Write Stick has a very compact format which makes it useable for many different applications. It comes with a small integrated antenna and USB interface.

Applications:

- Desktop Readers / Encoders
- Printers
- Access Control

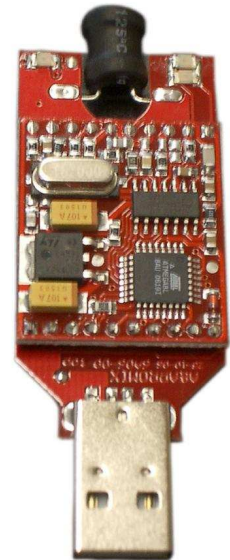

Product specification:

Interface:	USB
Integrated antenna:	Yes
Operating system:	Window, Linux
Power Supply:	5Vdc/60mA - Bus-self powered
Signals:	1 LED red + 1 LED two coloured
Temperature of use:	-20°C...+50°C
Supported transponders:	EM 4102 EM 4550 NXP Hitag 1/2 NXP Hitag S
Reading range:	with ISO card EM4102: 5cm
Dimensions:	79 x 27 x 8 mm
Order number:	R-OEM-125-STICK